活性炭折叠式过滤器

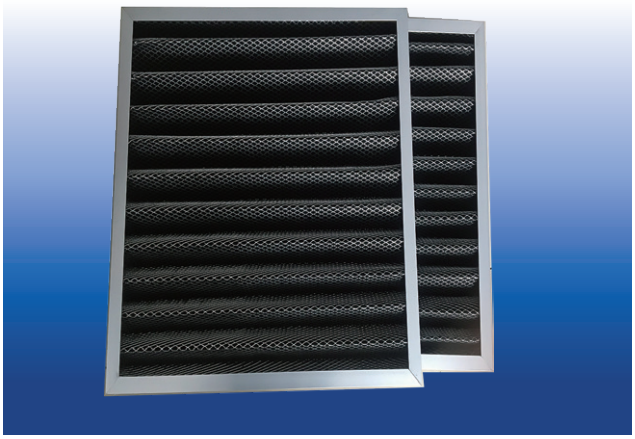

结构材质

滤材	优质颗粒状活性炭、球形活性炭、活性氧化铝球，活性炭棉等
支撑网	纸蜂窝、塑料蜂窝、金属箱体
外框	镀锌铁框、铝合金框、不锈钢框

技术指标

过滤对象	低浓度的异味、臭味、甲醛、苯、氨等有机物
耐温度	≤100℃
瞬间耐温	≤120℃
耐湿性（相对湿度）	≤80%RH
吸附率	≥30%

产品特点

- 具有较好的吸附性能和气体动力学性能，可广泛用于净化处理含有甲苯，二甲苯、苯、等苯类、酚类、脂类、醇类醛类、恶臭味等有机气体
- V型组合式结构，有限截面空间可过更大风量，安装方便
- 可更换炭粒，箱体框架可重复使用，从工艺和外形分为塑框FV单法兰组合式，金属框V单法兰组合式，金属框HV箱型组合式

应用领域

- 新风系统送风净化
- 家用，商用空气净化机二级或三级净化
- 废气排放一级或二级净化

订购信息

AC-ZD — 595x595x7 — /

型号	尺寸WxHxD(mm)			风速/初阻力		备注
	W	H	D（袋深）	最佳吸附风速(m/s)	初阻力(Pa)	
AC-ZD	595	595	7			其他长宽可以任意定制，深度除常规外也可定制选择
	...	...	...			

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required.

杭州大立过滤设备有限公司

地址：浙江省杭州市富阳区新登工业区贝山北路1号

电话：0571-63253538　　传真：0571-63256383

邮箱：sales@darllyfiltration.com　　网址：www.darllyfiltration.com