
有隔板空气过滤器



结构材质

外框	铝型材外框/镀锌外框/不锈钢外框/铝板框
滤料	超细防潮玻纤滤纸（进口、国产）
过滤效率	F7、F8、F9(EN 779)/E12、H13、H14、(EN 1822)
密封胶	双组分聚氨酯
分隔物	双胶纸/铝箔
密封垫	CR/EPDM/一体发泡
护网（可选）	喷塑网、不锈钢网、铝网
连续运行温度	≤80℃
最高运行湿度	≤80%RH/≤100%RH

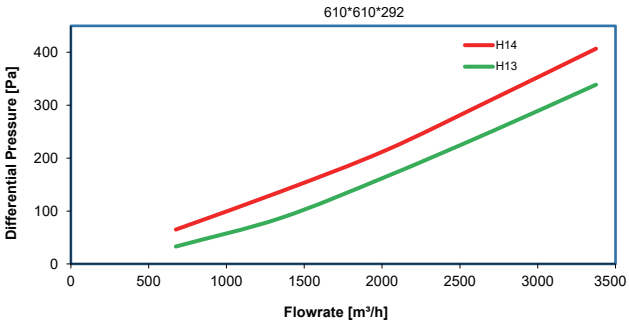

产品特点

- 锲形褶层设计，防止滤料损坏
- 铝型材外框可选用一体发泡技术，减少泄露风险
- 耐湿度最高可达100%
- 通用性强，安装方便
- 100%检漏测试，保证过滤器无漏点

应用领域

- 航天航空、电子、半导体、生物制药、医院、食品加工等净化系统
- 高效送风口等净化设备主过滤

类型信息

类型	实际尺寸 (mm)	额定风量	F7	F8	F9	E12	H13	H14
	W*H*D	m³/H	85%≤Em＜90%	90%≤Em＜95%	95%≤E	≥99.5%@MPPS	≥99.95%@MPPS	≥99.995%@MPPS
有隔板中效	610*610*150	1000	80	90	130	190	250	310
	762*610*150	1250						
	820*610*150	1350						
	320*320*220	400						
	484*484*220	1000						
	630*630*220	1500						
	1260*630*220	3000						
	592*592*292	1850						
	610*610*292	2000						

注：1、阻力 + /-15% 2、可定制任意非标尺寸 。

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required.

杭州大立过滤设备有限公司

地址：浙江省杭州市富阳区新登工业区贝山北路1号

电话：0571-63253538　　传真：0571-63256383

邮箱：sales@darllyfiltration.com　　网址：www.darllyfiltration.com